


# Dlink Wireless N150 WI-FI Router

## I. Comment configurer mon DWR-111?

Voici les étapes de configuration :

1. Insérez la clé 3g dans le port USB du DWR-111.
2. Raccordez votre DWR-111 au PC avec un câble Ethernet ou connectez-vous au réseau Wifi dlink\_DWR-111.
3. Lancez votre navigateur web et tapez <http://192.168.0.1>
4. Saisissez « **admin** » dans le champ **User Name**, laissez **Password** vide puis cliquez sur « **login** ».

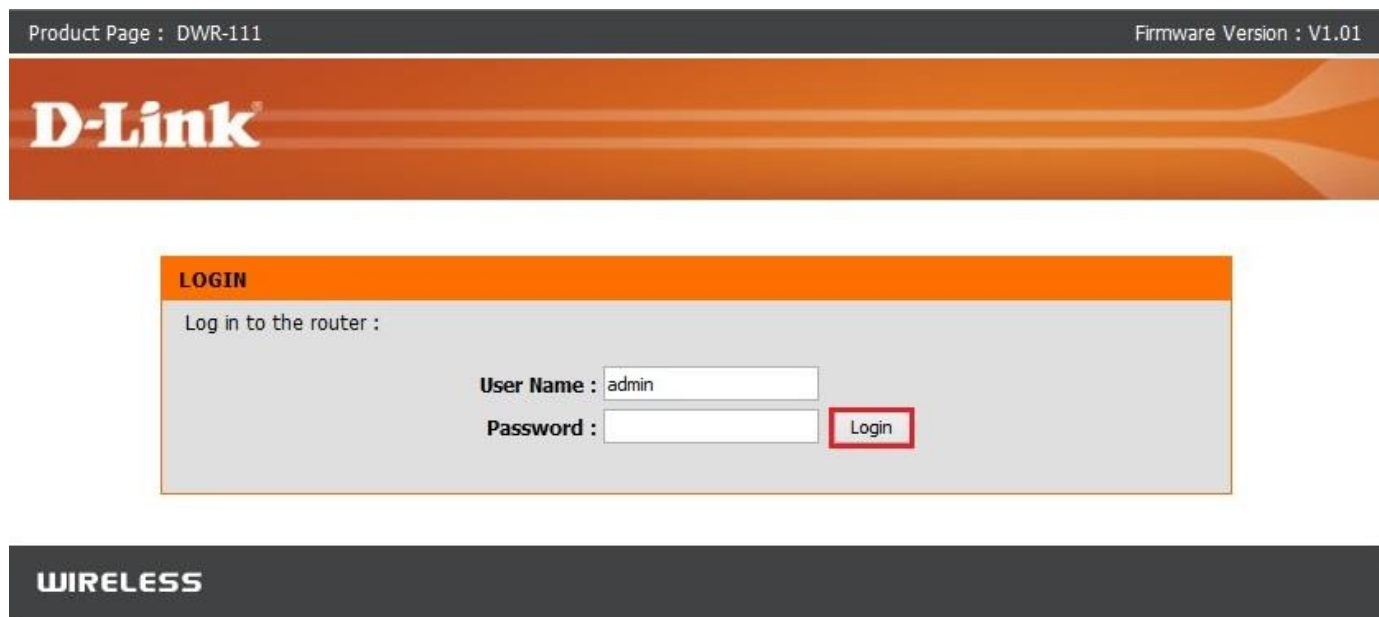


The screenshot shows the D-Link router's login interface. At the top, there is a dark grey header with 'Product Page : DWR-111' on the left and 'Firmware Version : V1.01' on the right. Below this is a large orange banner with the 'D-Link' logo in white. The main content area is a light grey box with an orange header labeled 'LOGIN'. Inside this box, it says 'Log in to the router :'. There are two input fields: 'User Name : admin' and 'Password :'. To the right of the password field is a red-bordered button labeled 'Login'. At the bottom of the page, there is a dark grey footer with the word 'WIRELESS' in white.

5. Allez dans « **Setup** », sélectionnez « **INTERNET** » dans le menu de gauche de l'écran puis cliquez sur « **Internet Connection Setup Wizard** ».

Product Page : DWR-111 Firmware Version : V1.01

---



| DWR-111  | SETUP 1   | ADVANCED | TOOLS | STATUS | SUPPORT  |
|--|---|----------|-------|--------|--|
| <p>INTERNET 2</p> <p>WIRELESS SETTINGS</p> <p>NETWORK SETTINGS</p> <p>LOGOUT</p> <p> Internet Online</p> <p style="text-align: center; border: 1px solid black; padding: 2px;">Reboot</p> | <div style="background-color: #f4a460; padding: 5px; text-align: center;"> <b>INTERNET CONNECTION</b> </div> <p>There are two ways to set up your Internet connection: you can use the Web-based Internet Connection Setup Wizard, or you can manually configure the connection.</p> <div style="background-color: #333; color: white; padding: 5px; text-align: center;"> <b>INTERNET CONNECTION SETUP WIZARD</b> </div> <p>If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your Router to the Internet, click on the button below.</p> <div style="text-align: center; margin: 10px 0;"> <span style="border: 2px solid red; padding: 2px 10px;">Internet Connection Setup Wizard</span> <sup>3</sup> </div> <p><b>Note :</b> Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p> <div style="background-color: #333; color: white; padding: 5px; text-align: center;"> <b>MANUAL INTERNET CONNECTION OPTIONS</b> </div> <p>If you would like to configure the Internet settings of your Router manually, then click on the button below.</p> <div style="text-align: center; margin: 10px 0;"> <span style="border: 1px solid gray; padding: 2px 10px;">Manual Internet Connection Setup</span> </div> |          |       |        | <p><b>Helpful Hints..</b></p> <ul style="list-style-type: none"> <li>If you are new to networking and have never configured a router before, click on <b>Internet Connection Setup Wizard</b> and the router will guide you through a few simple steps to get your network up and running.</li> <li>If you consider yourself an advanced user and have configured a router before, click <b>Manual Internet Connection Setup</b> to Input all the settings manually.</li> </ul> <p style="color: #f4a460;">More...</p> |

6. Cliquez sur « **Next** ».

**WELCOME TO THE SETUP WIZARD**

It appears that you have already successfully connected your new router to the Internet.

- Step 1: Set your Password
- Step 2: Select your Time Zone
- Step 3: Configure your Internet Connection
- Step 4: Save Settings and Connect

Prev **Next** Cancel Connect

7. Si vous souhaitez sécuriser l'accès à l'interface de votre périphérique, entrez un mot de passe puis cliquez sur « **Next** ».

**STEP 1: SET YOUR PASSWORD**

To secure your new networking device, please set and verify a password below:

Password :

Verify Password :

Prev **Next** Cancel Connect

8. Sélectionnez « **Time Zone** » puis cliquez sur « **Next** ».

**STEP 2: SELECT YOUR TIME ZONE**

Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.

Time Zone : (GMT -08:00) Pacific Time (US & Canada) ▼

Prev Next Cancel Connect

9. Cochez « **3G Connection** » puis cliquez sur « **Next** ».

**STEP 3: CONFIGURE YOUR INTERNET CONNECTION**

Please select the Internet connection type below:

- DHCP Connection (Dynamic IP Address)**  
Choose this if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.
- Username / Password Connection (PPPoE)**  
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this type of connection.
- Username / Password Connection (PPTP)**  
PPTP client.
- Username / Password Connection (L2TP)**  
L2TP client.
- 3G Connection**  
3G.
- Static IP Address Connection**  
Choose this option if your Internet Setup Provider provided you with IP Address information that has to be manually configured.

Prev Next Cancel Connect

10. Cliquez sur « **Next** ».

**SET 3G CONNECTION**

Dial-Up Profile :  Auto-Detection  Manual

Pin Code :

11. Cliquez sur « **Connect** ».

**SETUP COMPLETE!**

The Internet Connection Setup Wizard has completed. Click the Connect button to save your settings and reboot the router.

12. Allez dans « **Setup** », sélectionnez « **WIRELESS SETTINGS** » dans le menu de gauche puis cliquez sur « **Wireless Connection Setup Wizard** ».

Product Page : DWR-111 Firmware Version : V1.01

---

**D-Link**


|                   |                |                 |              |               |                |
|-------------------|----------------|-----------------|--------------|---------------|----------------|
| <b>DWR-111</b> // | <b>SETUP 1</b> | <b>ADVANCED</b> | <b>TOOLS</b> | <b>STATUS</b> | <b>SUPPORT</b> |
|-------------------|----------------|-----------------|--------------|---------------|----------------|

INTERNET

**WIRELESS SETTINGS 2**

NETWORK SETTINGS

LOGOUT

 Internet Offline

**WIRELESS CONNECTION**

There are 3 ways to setup your wireless connection. You can use the Wireless Connection Setup wizard or you can manually configure the connection.

**Please note that changes made on this section will also need to be duplicated to your wireless clients and PC.**

**WIRELESS CONNECTION SETUP WIZARD**

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your Wireless Router to the Internet, click on the button below.

3

**Note:** Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

**MANUAL WIRELESS CONNECTION OPTIONS**

If you would like to configure the Internet settings of your Router manually, then click on the button below.

**Helpful Hints..**

- If you are new to wireless networking and have never configured a wireless router before, click on **Wireless Connection Setup Wizard** and the router will guide you through a few simple steps to get your wireless network up and running.
- If you consider yourself an advanced user and have configured a wireless router before, click **Manual Wireless Connection Setup** to input all the settings manually.

**More...**

13. Cliquez sur « **Next** ».

**WELCOME TO THE SETUP WIZARD**

It appears that you have already successfully connected your new router to the Internet.

- Step 1: Set your Password
- Step 2: Select your Time Zone
- Step 3: Configure your Internet Connection
- Step 4: Save Settings and Connect

14. Saisissez le nom de votre réseau **SSID** puis cliquez sur « **Next** ».

**STEP 1: NAME YOUR WIRELESS NETWORK**

Your wireless network needs a name so it can be easily recognized by wireless clients.

Wireless Network Name (SSID) :

15. Cochez « **BEST** » puis cliquez sur « **Next** »

**STEP 2: SECURE YOUR WIRELESS NETWORK**

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

There are three levels of wireless security -Good Security, Better Security, or Best Security. The level you choose depends on the security features your wireless adapters support.

**BEST :**  Select this option if your wireless adapters SUPPORT WPA2  
**BETTER :**  Select this option if your wireless adapters SUPPORT WPA  
**GOOD :**  Select this option if your wireless adapters DO NOT SUPPORT WPA  
**NONE :**  Select this option if you do not want to activate any security features

For information on which security features your wireless adapters support, please refer to the adapters' documentation.

Note: All wireless adapters currently support WPA.

16. Dans le champ « **Wireless Security Password** », saisissez la clé de votre réseau sans fil puis cliquez sur « **Next** ».

**STEP 3: SET YOUR WIRELESS SECURITY PASSWORD**

Once you have selected your security level - you will need to set a wireless security password. With this password, a unique security key will be generated.

**Wireless Security Password :**

Note: You will need to enter the unique security key generated into your wireless clients enable proper wireless communication - not the password you provided to create the security key.



17. Cliquez sur le bouton « **Save** » pour enregistrer les modifications.



18. Le DWR-111 est maintenant configuré.

## II. Comment changer le mot de passe ADMIN?

1. Passez sur « **TOOLS** » puis cliquez sur « **ADMIN** »
2. Entrez votre nouveau mot de passe dans le champ « **New Password** », confirmez-le dans « **Confirm Password** » puis cliquez sur « **Save Settings** »

