



Configuration du Sagem 2604 (IP MSAN)

- Accédez à l'interface du modem via l'adresse **192.168.1.1** et saisissez « **admin** » comme nom d'utilisateur et mot de passe.

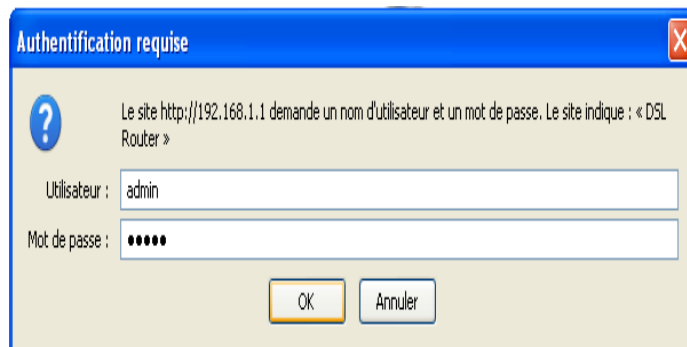

- Cliquez sur « **Advanced Setup** » puis « **Edit** ».

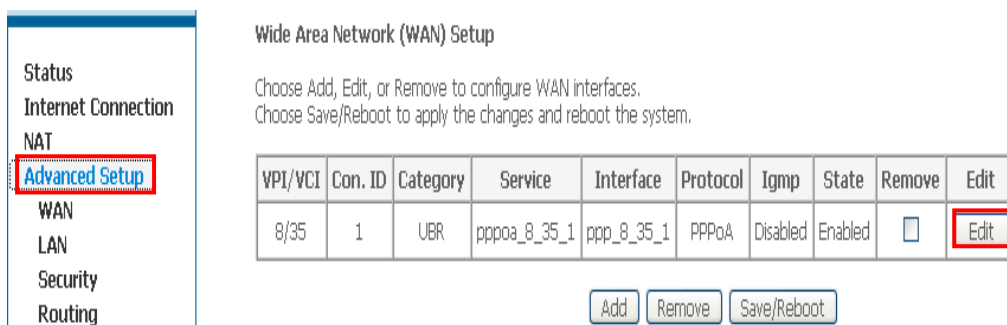


Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	Con. ID	Category	Service	Interface	Protocol	Igmp	State	Remove	Edit
8/35	1	UBR	pppoa_8_35_1	ppp_8_35_1	PPPoA	Disabled	Enabled	<input type="checkbox"/>	Edit

Add Remove Save/Reboot

- Saisissez dans les champs « **VPI=0** » et « **VCI=35** ».
- Cochez la case « **VLAN Mux-Enable Multiple Protocols Over a Single PVC** ».
- Saisissez **410** dans le champ « **802.1Q VLAN ID** » puis cliquez sur « **Next** ».

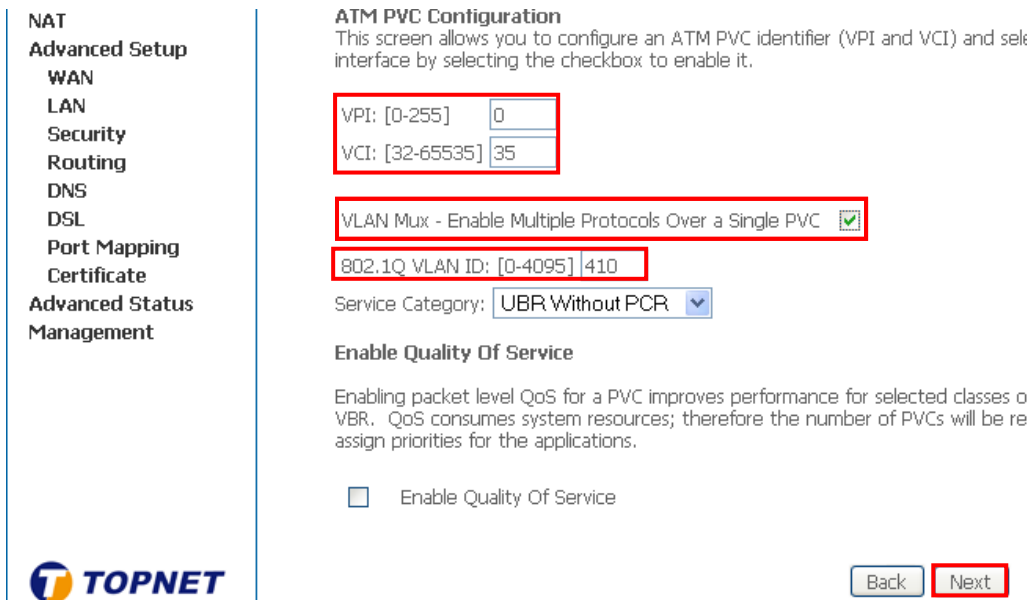

NAT
Advanced Setup
WAN
LAN
Security
Routing
DNS
DSL
Port Mapping
Certificate
Advanced Status
Management

ATM PVC Configuration
This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select interface by selecting the checkbox to enable it.

VPI: [0-255] 0
VCI: [32-65535] 35

VLAN Mux - Enable Multiple Protocols Over a Single PVC

802.1Q VLAN ID: [0-4095] 410


Service Category: UBR Without PCR

Enable Quality Of Service
Enabling packet level QoS for a PVC improves performance for selected classes of VBR. QoS consumes system resources; therefore the number of PVCs will be red assign priorities for the applications.

Enable Quality Of Service

Back Next

- Cochez « **PPPoE** » puis cliquez sur « **Next** ».

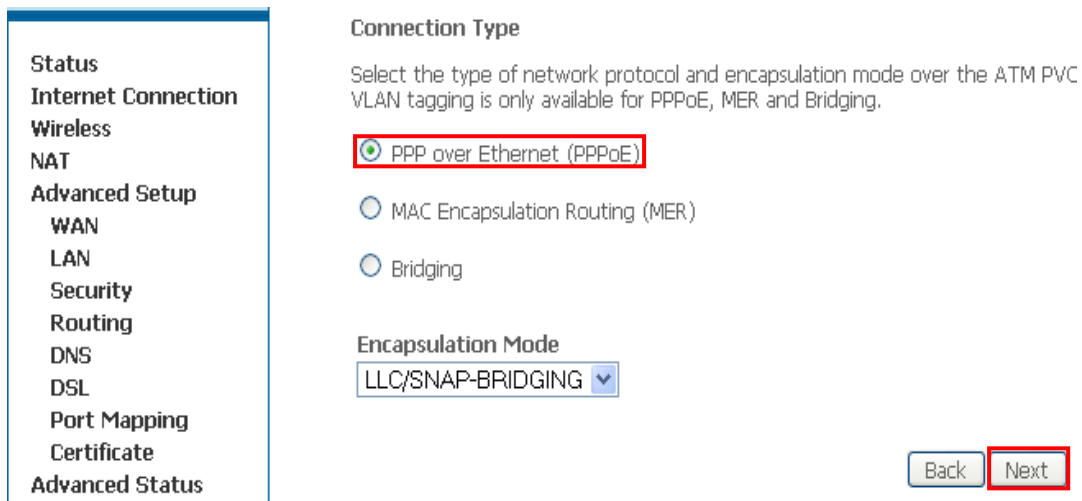

Status
Internet Connection
Wireless
NAT
Advanced Setup
WAN
LAN
Security
Routing
DNS
DSL
Port Mapping
Certificate
Advanced Status


Connection Type
Select the type of network protocol and encapsulation mode over the ATM PVC. VLAN tagging is only available for PPPoE, MER and Bridging.

PPP over Ethernet (PPPoE)
 MAC Encapsulation Routing (MER)
 Bridging

Encapsulation Mode
LLC/SNAP-BRIDGING

Back Next

- Entrez vos **paramètres de connexion ADSL** dans les champs correspondant.
- Cochez la case « **Retry PPP password on authentication error** ».

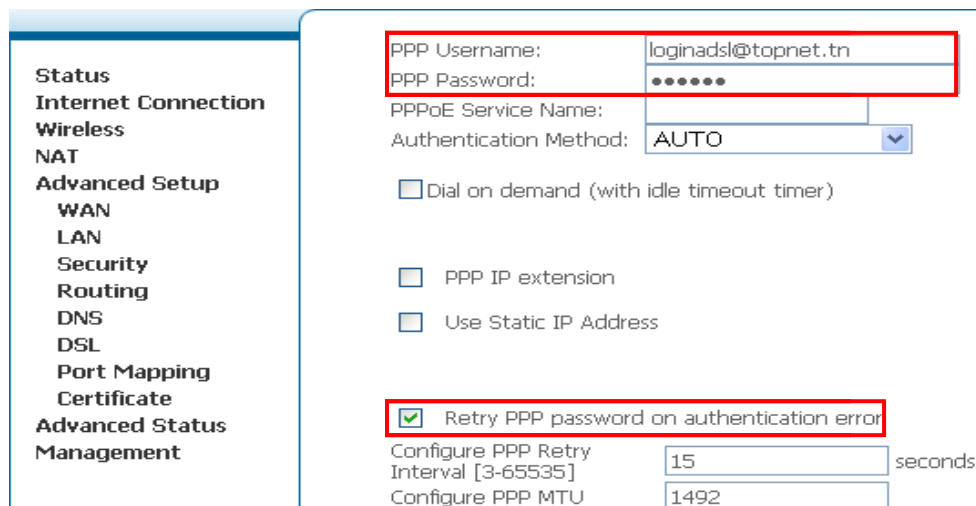

PPP Username: loginadsl@topnet.tn
PPP Password: ●●●●●●
PPPoE Service Name:
Authentication Method: AUTO

Dial on demand (with idle timeout timer)


PPP IP extension

Use Static IP Address

Retry PPP password on authentication error

Configure PPP Retry Interval [3-65535] 15 seconds
Configure PPP MTU 1492

- Cliquez sur « **Next** ».

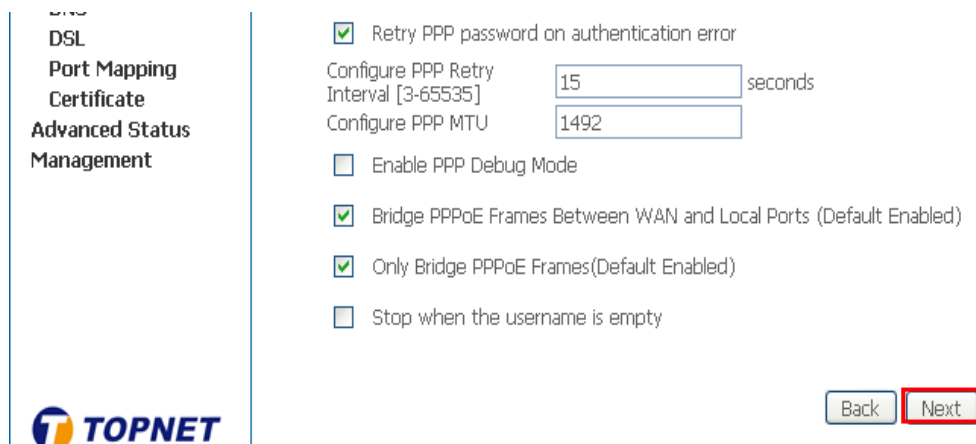

Retry PPP password on authentication error

Configure PPP Retry Interval [3-65535] 15 seconds
Configure PPP MTU 1492

Enable PPP Debug Mode

Bridge PPPoE Frames Between WAN and Local Ports (Default Enabled)

Only Bridge PPPoE Frames (Default Enabled)

Stop when the username is empty

Back Next

- Cochez les cases « **Enable NAT** » et « **Enable Firewall** » puis cliquez sur « **Next** ».

Status
Internet Connection
Wireless
NAT
Advanced Setup
 WAN
 LAN
 Security
 Routing
 DNS
 DSL
 Port Mapping
 Certificate
Advanced Status
Management

Network Address Translation Settings

Network Address Translation (NAT) allows you to share one Wide Area Network Area Network (LAN).

Enable NAT

Enable Firewall

Enable IGMP Multicast, and WAN Service

Enable IGMP Multicast

Enable WAN Service

Service Name

- Cliquez sur « **Save** ».

Status
Internet Connection
Wireless
NAT
Advanced Setup
 WAN
 LAN
 Security
 Routing
 DNS
 DSL
 Port Mapping
 Certificate
Advanced Status
Management

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

VPI / VCI:	0 / 35
Connection Type:	PPPoE
Service Name:	FF
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.
NOTE: You need to reboot to activate this WAN interface and further configure :

- Cliquez sur « **Save/Reboot** » pour enregistrer la configuration effectuée.

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.

Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	VLAN Mux	Con. ID	Category	Service	Interface	Protocol	IGMP	QoS	State	Remove	Edit
0/35	410	1	UBR	FF	ppp_0_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>